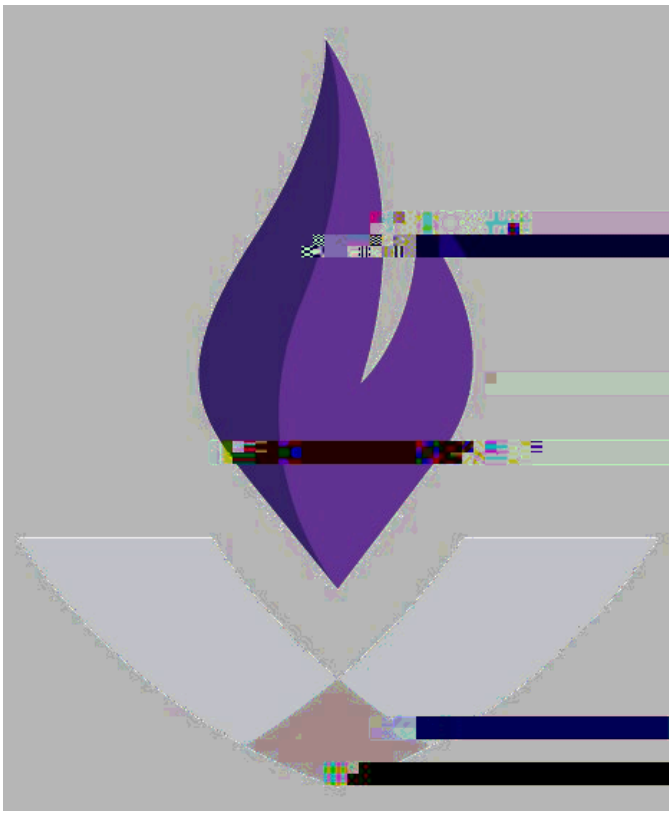

ARROW

PA-28R-201

PILOT'S CHECKLIST

2025

NOSE SECTION

Fuel and Oil.....CHECK FOR LEA
General Condition.....CHECK
Cowling.....SECUR
Oil.....CHECK QUANTITY (6 qts)
Dipstick.....PROPERLY SEAT
Oil Filler Inspection Door.....SECURE
Air Inlets.....CLEAR, REMOVE COVE
Engine Baffle Seals.....CHE
Alternator Belt.....CHECK TENSION
Windshield.....CLEAN
Propeller and Spinner.....CHECK
Landing Light.....CHECK
Chock.....REMOVE
Nose Gear Strut.....CHECK (approx. 2.75 in)
Nose Wheel Tire.....CHECK
Switches and Gear Well.....CHECK
Fuel Strainer.....DRAIN

FUSELAGE

Antenna.....CHECK
Left Static Vent.....CLEAR
Fresh Air Inlet.....CLEAR
Empennage.....FREE OF ICE, FROS
Stabilator.....CHECK FOR INTERFERENC
Tail Tie Down.....DISCONNECT
Right Static Vent.....CLEAR
Final Walk Around.....COMPLETE
Baggage Door.....SECURE

LEFT WING

Wing.....FREE OF ICE, SNOW, FROST
Fresh Air Inlet.....CLEAR
Main Gear Strut.....CHECK (approx. 2 in.)
Tire.....CHECK
Brake Block and Discs.....CHECK
Switches and Gear Well.....CHECK
Fuel Tank.....CHECK SUPPLY & SECURE CAP
Fuel Tank Sump.....DRAIN
Fuel Vent.....CLEAR
Wing Tie Down and/or Chocks.....REMOVE
Pitot Mast.....REMOVE COVER, HOLES CLEAR
Stall Warning Vane.....CHECK
Wing Tip and Lights.....CHECK
Aileron and Flaps.....CHECK MOVEMENT, SECURITY
Static Wicks.....CHECK

RUN UP

Brakes/Parking Brake.....HOLD AND SET
Mixture.....FULL RICH
Propeller.....FULL INCREASE
Throttle.....2000 RPM
Magnetos.....CHECK

ENGINE FIRE DURING START

Starter……CRANK ENGINE
Mixture……IDLE CUT OFF
Throttle……OPEN
Electric Fuel Pump……OFF
Fuel Selector ……OFF

ABANDON IF FIRE CONTINUES

LOSS OF OIL PRESSURE

> v • ^}}v • W}••] o v /vÀ •Ÿ P š šZ
Cause.
PREPARE FOR POWER OFF LANDING